

ET SYSTEM

FOR ADVANCED CONTROL, THE ET SYSTEM AUTOMATICALLY CREATES AN IRRIGATION PROGRAM DAILY BY MEASURING EVAPOTRANSPIRATION RATES.

FEATURES

- Calculates evapotranspiration (ET) for individual microclimate to fit the exact landscape requirements
- Specific irrigation scheduling for every zone based on the characteristics of each
- Enables compliance with local watering restrictions
- Easily upgrades Hunter SRC, PCC, Pro-C, and ICC to weather-based controllers
- Non-volatile memory
- Full range of scheduling options
- Includes 100 ft. of 18 AWG, 2-conductor for sensor installation
- WiltGard™ technology triggers protective watering when extreme conditions threaten plants
- Warranty period: 2 years

SPECIFICATIONS


Station maximum: 48

Power input: 24 VAC, 50/60 Hz (from host controller)

Current draw: 20 mA, maximum

Max. distance, ET Sensor from module: 100'

Sensor wire: Includes 100' of UL approved wire

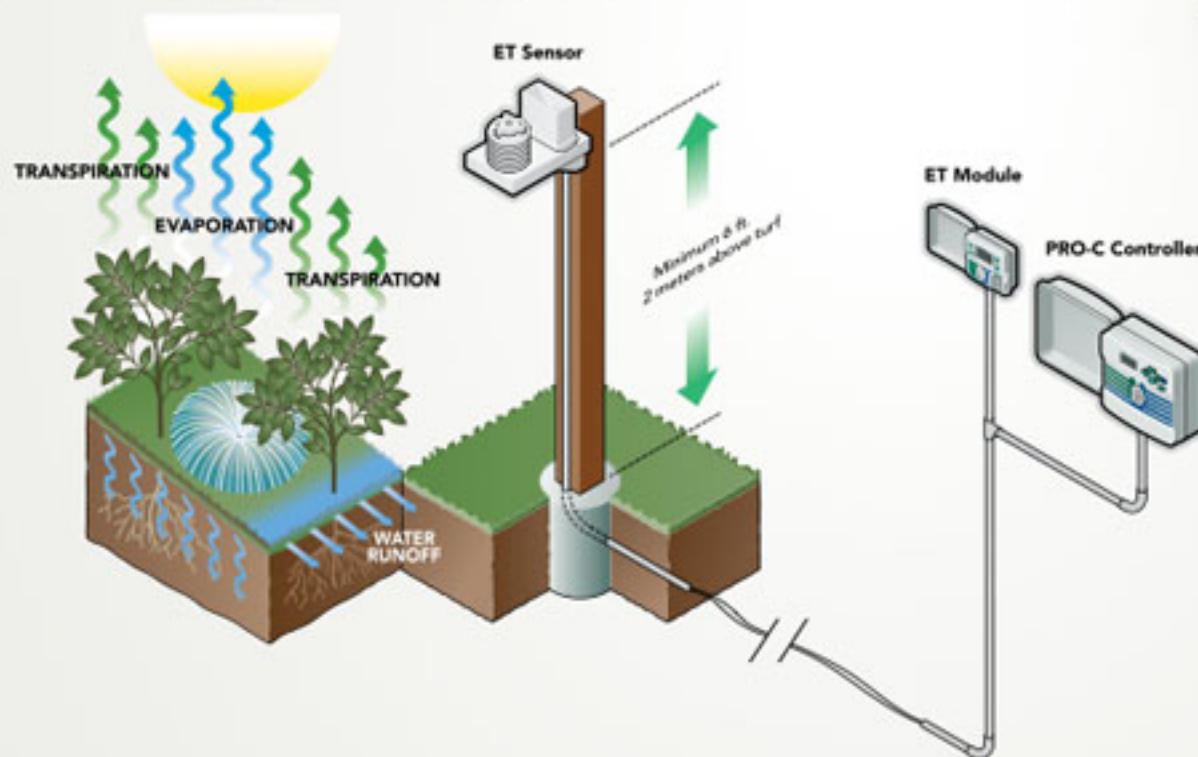

Dimensions

ET Sensor with pole brackets:
10 1/2" H x 7 1/4" W x 13" D

ET Sensor with ET Wind:
11 1/2" H x 7 1/4" W x 19 1/4" D

ET Sensor and ET Wind with pole brackets:
11 1/2" H x 7 1/4" W x 20 3/4" D

SPECIFICATIONBUILDER

www.hunterindustries.com/ETSYSTEM

MODELS SPECIFY SEPARATELY FROM CONTROLLER

ET SYSTEM = ET Sensor with outdoor interface ET Module, for direct connection to Hunter SRC, PCC, Pro-C, ICC controllers

ET WIND = Optional anemometer to gather wind speed data

ET SENSOR = ET Sensor only for use with IMMS-ET installations

EXAMPLE

ET SYSTEM