

# ROOT ZONE WATERING SYSTEM

APPLICATION  
Residential/Commercial  
Shrub and Tree Irrigation

SIZES  
10", 18", 36"

FLOW RATES  
0.25 or  
0.50 GPM

**FOR HEALTHIER TREES AND SHRUBS,  
GET TO THE ROOT OF THINGS.**

**FEATURES**

- Built in Hunter Swing Joint for direct installation to ½" PVC fitting
- Patented StrataRoot baffles divert water to root zone while adding strength to the unit
- Locking cap

**DIMENSIONS**

- 10": 2" diameter x 10" length
- 18": 3" diameter x 18" length
- 36": 3" diameter x 36" length

**OPERATING SPECIFICATIONS**

- Bubbler flow rates: 0.25 or 0.50 GPM
- Recommended pressure range: 15 to 70 PSI

**FACTORY INSTALLED OPTIONS**


- Check valve
- Locking reclaimed purple cap

**USER INSTALLED OPTIONS**

- Sleeve: Fabric sleeve that helps prevent soil intrusion in sandy soils (P/N RZWS-SLEEVE)
- Replacement cap 18" and 36" only (P/N RZWS-CAP)
- Locking reclaimed purple cap 18" and 36" only (P/N RZWS-RCCAP)



Standard and reclaimed models available

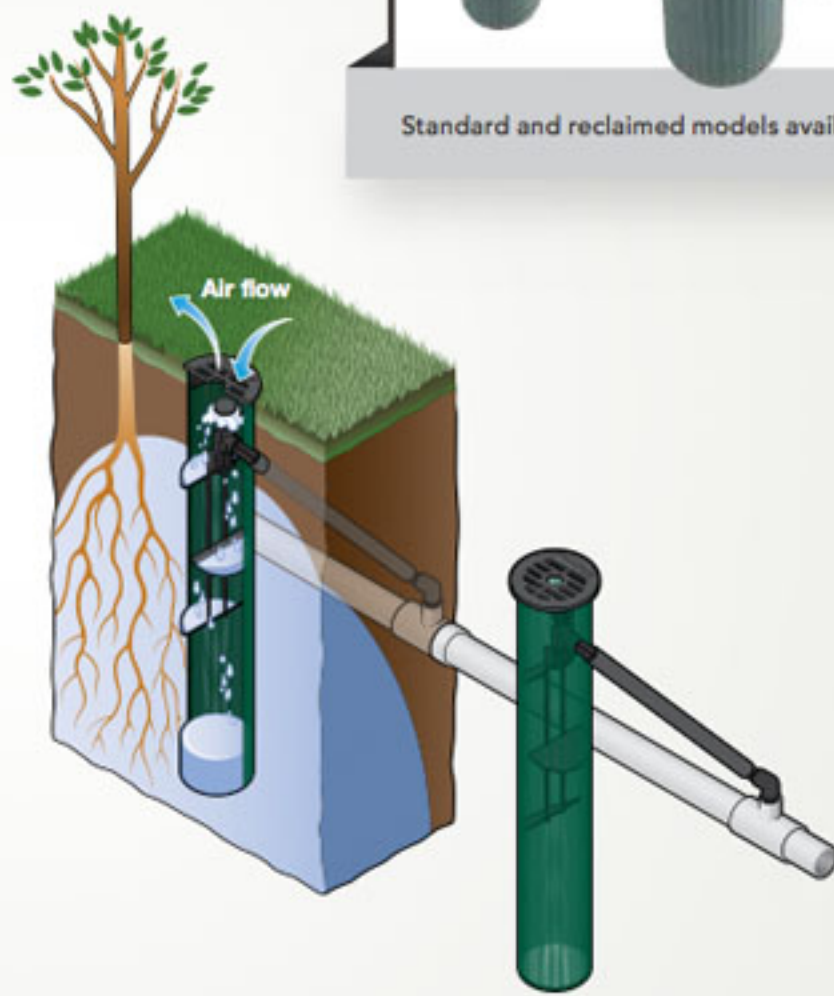

## SPECIFICATIONBUILDER

[www.hunterindustries.com/RZWS](http://www.hunterindustries.com/RZWS)

MODELS	BUBBLER FLOW RATE	OPTIONS
RZWS-10 = 10" Root zone watering system	25 = 0.25 GPM	(blank) = No option
RZWS-18 = 18" Root zone watering system	50 = 0.50 GPM	CV = Check valve
RZWS-36 = 36" Root zone watering system		R = Reclaimed cap
		CV-R = Check valve with reclaimed cap

**ADDITIONAL OPTIONS  
SPECIFIED SEPARATELY**

- RZWS-SLEEVE = Field installed sleeve made from filter fabric
- RZWS-CAP = Replacement cap for 18" and 36" models
- RZWS-RCCAP = Reclaimed water replacement cap for 18" and 36" models

EXAMPLES

<b>RZWS-18 - 25 - CV</b>	18" Root zone watering system at 0.25 GPM, with check valve
<b>RZWS-10 - 50 - R</b>	10" Root zone watering system at 0.50 GPM, with reclaimed cap
<b>RZWS-36 - 25 - CV</b>	36" Root zone watering system, at 0.25 GPM, with check valve

DRIP / MICRO