

# MINI-CLI<sup>®</sup>

[www.hunterindustries.com/MINICLIK](http://www.hunterindustries.com/MINICLIK)

## MINI-CLI IS THE SIMPLEST WAY TO SHUT DOWN SYSTEMS DURING RAINFALL.

### FEATURES


- Easily installs on any automatic irrigation system
- Debris tolerant for reliable operation and no unnecessary shutdowns
- Can be set to shut system off from 1/8" to 1" of rainfall
- Includes 25' of 20 gauge sheathed, two-conductor, UL-approved wire
- Optional user-installed metal gutter mount for Mini-Click<sup>®</sup> (order SGM)
- Warranty period: 5 years

### SPECIFICATIONS

Switch rating: 24 VAC, 5 A

Wiring: Typically interrupts the common ground wire between the solenoid valves and the controller

UL listed

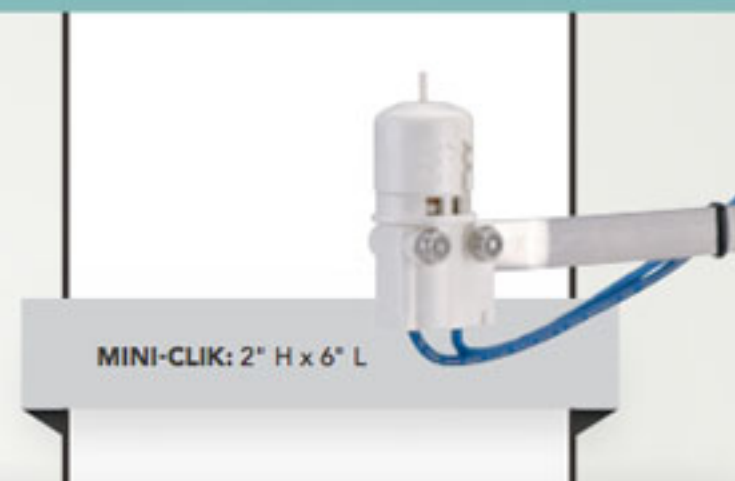

## SPECIFICATIONBUILDER

MODEL	OPTIONS
MINI-CLI <sup>®</sup>	(blank) = No option HV = High voltage model for 110/220 VAC applications C = Conduit mount NO = Normally open switch

### USER INSTALLED OPTION SPECIFY SEPARATELY

SGM = Optional gutter mount

#### EXAMPLES

<b>MINI-CLI<sup>®</sup></b>	Mini-Click rain sensor
<b>MINI-CLI<sup>®</sup> - C</b>	Mini-Click rain sensor with conduit mount

# FREEZE-CLI<sup>®</sup>

[www.hunterindustries.com/FREEZECLICK](http://www.hunterindustries.com/FREEZECLICK)

## WHEN FRIGID TEMPS SET IN, FREEZE-CLI STOPS SPRINKLERS TO AVOID DANGEROUS, ICY CONDITIONS.

### FEATURES

- Installs easily with no adjustment needed
- Accurate temperature sensing shuts system off when air temperature reaches 37° F
- Used with other sensors to enhance overall efficiency of irrigation systems
- Warranty period: 5 years

*Note: Not intended for agricultural applications.*

### SPECIFICATIONS

Switch rating: 24 VAC, 5 A

Wiring: Typically interrupts the common ground wire between the solenoid valves and the controller

UL listed



## SPECIFICATIONBUILDER

MODEL	OPTIONS
FREEZE-CLI <sup>®</sup>	(blank) = No option REV = Reverse switching

#### EXAMPLE

**FREEZE-CLI<sup>®</sup>**