

RAIN-CLIK™

RAIN-CLIK'S QUICK RESPONSE™ TURNS OFF SYSTEMS THE INSTANT RAIN STARTS TO FALL.

FEATURES

Models: Rain-Clik, Rain/Freeze-Clik, Wireless Rain-Clik, Wireless Rain/Freeze-Clik

- Quick Response™ feature shuts the system off as soon as it starts raining
- Maintenance-free design with 10-year battery life
- Adjustable vent ring allows for setting of reset delay
- Rugged polycarbonate housing and metal extension arm
- Rain-Clik includes 25' of 20 gauge sheathed, two-conductor, UL-approved wire
- Wire-free operation allows easy installation on new or existing systems
- Sensor operates up to 800 ft. from receiver unit
- Built-in bypass switch on receiver panel
- Wireless Rain/Freeze-Clik sensor protects against ice caused by irrigation on landscapes, roads, and walkways
- Compatible with most controllers
- Warranty period: 5 years


SPECIFICATIONS

- Wiring: normally closed or normally open
 - Time to turn off irrigation system: 2 to 5 minutes approx. for Quick Response
 - Time to reset Quick Response: 4 hours approx. under dry, sunny conditions
 - Time to reset when fully wet: 3 days approx. under dry, sunny conditions
 - Operating temperature: 32° F to 130° F
 - UL listed, CUL (CSA), CE
 - Optional user installed gutter mount for Rain-Clik (order SGM)
 - Switch rating: 24 VAC, 3 A
 - Freeze sensor shuts system off when temperatures fall below 37° F (Rain/Freeze-Clik model)
 - System operating frequency: 433 MHz
 - UL listed, FCC approved, suitable for use in Australia, CUL (CSA), CE
 - Communication range up to 800 ft. line of sight*
 - Wireless Rain/Freeze-Clik shuts system off when temperatures fall below 37° F
 - Receiver input power: 24 VAC (from controller)
- = Applicable to Rain-Clik only
 ☼ = Applicable to Wireless Rain-Clik only
 • = Applicable to Rain-Clik and Wireless Rain-Clik

* Consult with factory for compatibility in export markets.

APPROVAL

FCC

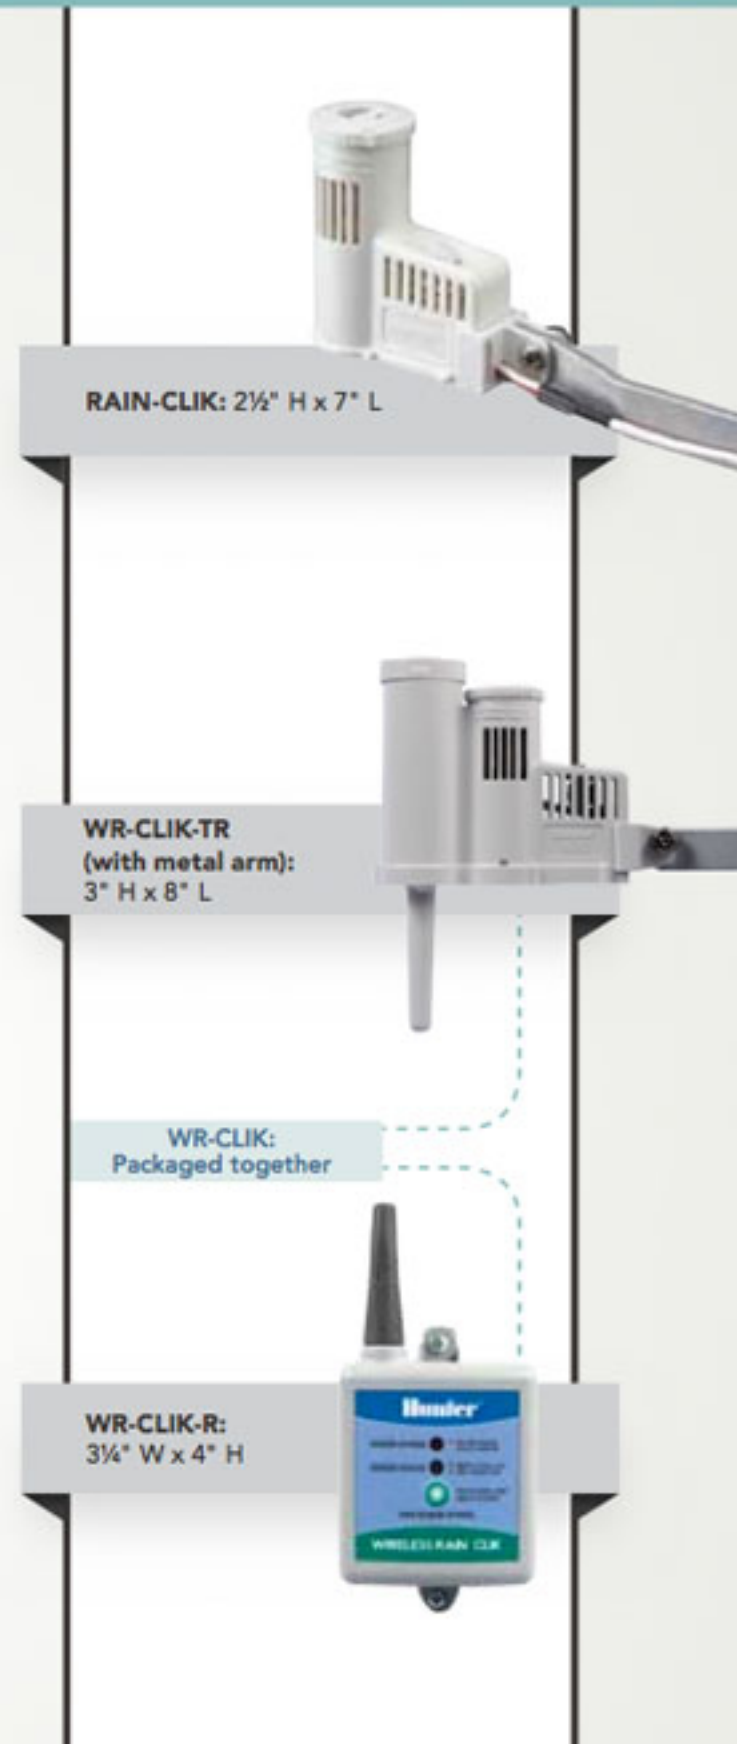

SPECIFICATIONBUILDER

www.hunterindustries.com/RAINCLIK

MODEL	OPTIONS
RAIN-CLIK = Rain-Clik sensor	(blank) = No option
RFC = Rain/Freeze-Clik sensor	NO = Normally open switch
	SGM = Optional gutter mount

USER INSTALLED OPTION SPECIFY SEPARATELY

SGM = Optional gutter mount

EXAMPLES

RAIN-CLIK	Rain-Clik sensor
RFC - SGM	Rain/Freeze Clik sensor with gutter mount

MODELS	
WR-CLIK = Wireless Rain-Clik system	
WRF-CLIK = Wireless Rain/Freeze-Clik system	

USER INSTALLED OPTION SPECIFY SEPARATELY

SGM = Optional gutter mount (included in the WRF-CLIK)

EXAMPLES

WR-CLIK	Wireless Rain-Clik system
WRF-CLIK	Wireless Rain/Freeze-Clik system with gutter mount